


# Bioreactor Cover Benefits Corn Processor in Multiple Ways

BY JIM MCMAHON

• Canadian corn products refiner Casco Inc. upgraded its 4-million-gallon wastewater anaerobic digester with the latest in floating cover designs from Geomembrane Technologies Inc. which streamlined biogas collection, heat retention and odor control.

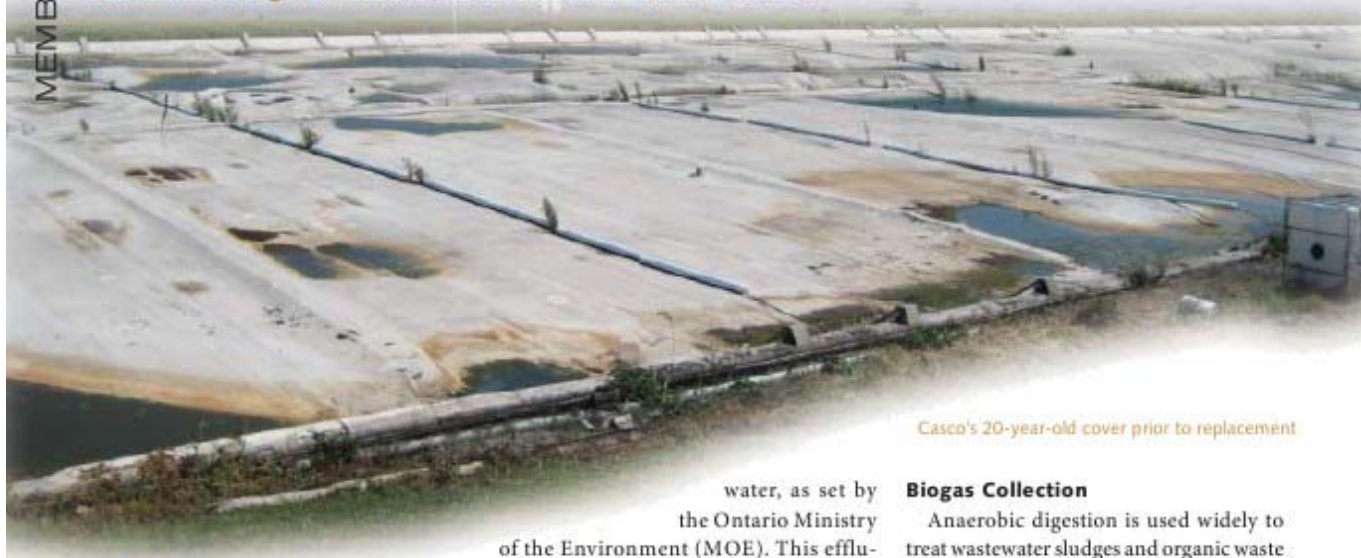

Casco's 20-year-old cover prior to replacement

As one of Canada's biggest, and oldest, manufacturers of corn-refined ingredients, Casco Inc.'s products are used in industries from food and beverage to pharmaceuticals to paper manufacturing. Combined, its three Ontario-based facilities process 4.5 million bushels of corn each month. One of its plants in the town of Cardinal on the St. Lawrence River about 50 miles south of Ottawa, is among the most automated corn wet milling facilities in the industry. Opened in 1858, and processing 70 million pounds of corn monthly, the facility makes high fructose corn syrup, glucose, specialty starches and corn oil. Along with its high-volume of production, the plant needs to process a continuous effluent of organic waste – an average of 792,000 gallons per day (gpd) of wastewater, 80% of which is processed through its anaerobic digester or bioreactor.

## Wastewater Generation

Casco's BVF (bulk volume fermenter), designed and built in 1988 by ADI Systems, is limited to 641,000 gpd of waste-

water, as set by the Ontario Ministry of the Environment (MOE). This effluent is generated from several areas of the plant through a process called wet milling, where various components from the exterior and interior of the kernel are mechanically and chemically separated. A softened-kernel mixture is ground in a mill to separate the starch and gluten from the hulls. The protein, called gluten meal or corn meal, is then separated from the starch. The starch is either refined into sugar – or turned into food-grade or industrial-grade starch by employing surfactants to chemically alter the granules.

This process accounts for 10% of the wastewater effluent going into the BVF. During conversion of the starch to sugar, ion exchange resins are employed requiring use of hydrochloric acid and caustic for regeneration. The initial regeneration flow, along with any sugar rinsed out with the resins, goes out as wastewater to the BVF reactor, accounting for 70% of the plant's total effluent. Various other processes of the plant supply small volumes of effluent to the BVF.

## Biogas Collection

Anaerobic digestion is used widely to treat wastewater sludges and organic waste because it provides volume- and mass-reduction of the input material. Casco's raw solids are added directly into its BVF for digestion. Comparatively long retention times – typically over seven days – and the large physical size of the 4-million-gallon bioreactor with a high volume of biomass maintained in it, work together to provide the system with inherent stability against shock conditions caused by organics and solids loading, temperature and pH fluctuations.

The biological breakdown of organic matter in the absence of oxygen gives off primarily methane, but also carbon dioxide and some traces of hydrogen sulfide, together labeled biogas. Although biogas-derived methane and carbon dioxide come from an organic source with a short carbon cycle, they still contribute to atmospheric greenhouse gas concentrations. This is lessened, though, when biogas is combusted. The energy release allows biogas to be used as a fuel to run heat engines or to generate mechanical or electrical power, making anaerobic digestion a renewable energy source.



The Casco facility's new GTI floating geomembrane cover

The Casco plant has used a geomembrane cover on its BVF bioreactor since it became operational. In 2008, Casco upgraded to an improved-design floating, insulated geomembrane cover with a streamlined capability to collect biogas. The cover captures all of the biogas from the BVF treatment process. Without a cover, the biogas would be released to the atmosphere. Designed and built by Geomembrane Technologies Inc. (GTI), this new cover is collecting an average of 236,000 cubic feet per day of biogas from the bioreactor at a 65% methane concentration.

#### Greater Durability

"Over the past two years, Casco's 20-year-old cover was getting to where it needed to be overhauled or changed," says GTI engineer Victor Cormier. "It was beginning to inhibit biogas collection. Our latest cover design is significantly different from the previous cover, which fluctuated up and down with the wastewater level inside the tank. This new design is a trampoline type, with no folds and a very taut fit for better biogas collection."

Casco's new cover is made up of a 1" layer of polyethylene foam laminated to polyethylene sheeting on the wastewater-

facing side. The top layer is a non-laminated sheet of 40 mil specialty PVC (ethylene interpolymer alloy) that acts as a gastight barrier to keep the biogas from passing through. It also incorporates a weave design that provides maximum strength-to-weight ratios. And, since this topsheet is exposed to the sun, it is equipped with advanced UV inhibitors. The polyethylene sheeting and insulation is perforated to allow the biogas to pass through and become trapped by the top layer. This design has exceptional seam strength, extreme puncture and tear resistance, low thermal expansion and contraction properties, a wide range of chemical resistance, high flexibility, and dimensional stability under high loads and temperature fluctuations.

The cover works under a vacuum, using a blower system which keeps the gases withdrawn and suctioned underneath it. The system incorporates a novel floating-beam design which creates a tent-like effect giving extra migration paths for the biogas to follow. All cover panel sides are bolted down to make a gastight seal. All of this helps overcome deficiencies found in the use of traditional poly-



#### PROTECT REVERSE OSMOSIS UNITS UPSTREAM

- |                       |                       |
|-----------------------|-----------------------|
| Improve RO Efficiency | Decrease Blinding     |
| Cut Operator Costs    | Eliminate Cartridges  |
| Automatic Operation   | Continuous Filtration |

Aids in trouble free, continuous operation of your RO unit

Prevents blinding of RO unit membranes by removing particulates down to 1 micron.



1254 Erie Avenue; North Tonawanda, NY 14120  
Phone: 716-693-9381 Fax: 716-693-9882  
Website: [www.asmfab.com](http://www.asmfab.com) Email: [sales@asmfab.com](mailto:sales@asmfab.com)

**BURCO FILTERS**  
by Ascension Industries

Circle No. 17 on Reader Service Card

ethylene topsheets.

Once collected, Casco's biogas is then flared, but Casco is examining options for utilizing the biogas within the plant.

#### Heat Retention

The efficiency of the BVF bioreactor – its ability to maintain digestion of continuously incoming influent – is critically dependent on keeping its temperature at 25-32°C. This is particularly important in cooler, northern climates like Casco's. Heat loss in large volumes of wastewater translates to energy loss, and lost heat must then be compensated for by adding heat. Casco supplements its BVF with heat generated from its refinery wastewater, which is intentionally heated to maintain the bioreactor's temperature.

Casco's new cover provides a heightened level of insulation to better hold heat within the reactor, and its snug fit reduces heat loss better than the previous cover. Elimination of water evaporation, prevention of ice buildup within the reactor, and reduced sunlight penetration also help maintain proper water temperature. These factors all contribute to decreasing Casco's energy consumption.

#### Averting Unplanned Releases

Control of a potential unplanned biogas release and its attendant odor – which is generated mainly from hydrogen sulfide – prompted Casco to move forward with the new upgraded cover. Standards set by the Ontario MOE do not allow methane to be released to the environment. Casco needed certainty that the cover on the BVF would meet these standards. Complicating the problem is 150 feet from the bioreactor is a residential neighborhood, which could present a safety hazard if case of an unplanned methane release.

"GTI was doing regular inspections on the original cover," says Gerald Morand, Casco process engineer and environmental coordinator. "Their technicians advised us the cover had become thin in a number of areas and was getting to an imminent point where it could fail. Our technicians were no longer unable to walk out on the cover to take measurements of sludge levels. Because of this and the environmental and safety implications, we made the decision to replace the cover."

#### Challenging Cover Switch

Due to possibility of an unplanned biogas release – GTI quickly completed the project in less than three weeks. A critical factor was a need to execute the cover switch without stopping the wastewater flow from manufacturing. The solution involved diverting some plant effluent away from the BVF to the aerobic lagoon while work was in progress.

"We were concerned with the activity of the BVF unit while the cover was off," continues Morand. "Exposed to the air, we expected the bioreactor to have a decrease in activity, so we didn't want to overload the system. We decreased the COD going to the BVF by 55%, leaving enough influent to keep the biological activity up but diverting the balance directly to the aerobic lagoon."

The bioreactor is directly adjacent to the St. Lawrence River, with only 25 feet of clearance available on three sides of the system. The fourth side was bound by a railroad line. This posed challenges with both removing the old cover and installing the new one, necessitating GTI to manufacture and transport the 130-foot by 410-foot new cover in four large folded and rolled sections. The rolls were placed directly onto the BVF water one at a time

with heavy equipment, opened and connected together.

"The floating beam design allowed us to connect the large cover panels together without having to weld them," Cormier said. "We minimized the use of heat, because we didn't want to ignite the biogas. We also removed the old cover at the same time the new cover was being installed to limit the release of biogas."

#### More Energy-Efficient Cover

Inevitably, manufacturers with anaerobic wastewater bioreactors will gravitate to more energy-efficient cover systems to maximize biogas collection and usage, streamline their operations and improve their bottom line. Those companies that do upgrade to the latest cover technology will find themselves in a better competitive position, particularly as energy costs continue to escalate and become an increasingly critical factor in plant operations.

"Companies are looking for both wastewater and freshwater cover systems that are environmentally proven, energy efficient and essentially maintenance free," says Hollis Cole, president and CEO of GTI. "Floating, insulated geomembrane covers represent the most advanced level of this technology." **WWW**

Acknowledgment: The author would like to thank Geomembrane Technologies Inc. for its assistance in writing this article. Contact: 506-452-7304, bms@gti.ca or [www.gticovers.com](http://www.gticovers.com)

About the Author: Jim McMahon writes on water and wastewater systems for Zebra Communications. His feature stories on industrial technology and green energy have been carried by hundreds of publications throughout the world.

Circle No. 102 on Reader Service Card

## EVENTS - CONTINUED

### NOVEMBER 2009

- ▲ Nov. 3-4 – Hach Industrial Wastewater/ Steam Generation & Power Seminars, Mobile, AL: [www.hach.com](http://www.hach.com)
- ▲ Nov. 3-5 – WonderWorld 2009 North American Conference, Anaheim, CA: [www.wonderware.com/wworld09](http://www.wonderware.com/wworld09)
- ▲ Nov. 3-5 – L.A. Steam Operator's License Training - 3 Day Seminar, Downey, CA, [www.socalgas.com/erc/](http://www.socalgas.com/erc/)

▲ Nov. 15-19 – 1st Int'l Water Assoc. Development Congress, Mexico City: [www.iwa2009mexico.org](http://www.iwa2009mexico.org)

▲ Nov. 17-19 – ChemShow, New York City: [www.chemshow.com](http://www.chemshow.com)

### DECEMBER 2009

- ▲ Dec. 7-8 – Northwest Environmental Conference & Tradeshow, Portland, OR: [www.nwec.org](http://www.nwec.org)
- ▲ Dec. 8-10 – Power-Gen Int'l, Las Vegas: [www.power-gen.com](http://www.power-gen.com)
- ▲ Dec. 10-13 – NGWA Ground Water Expo,

New Orleans: [www.ngwa.org](http://www.ngwa.org)

### JANUARY 2010

- ▲ Jan. 15-18 – American Boiler Manufacturers Assoc. Annual Meeting, Scottsdale, AZ: [www.abma.com](http://www.abma.com)
- ▲ Jan. 17-20 – IDFA Dairy Forum, Phoenix, AZ: [www.idfa.org](http://www.idfa.org)

*For a comprehensive list of the events for the Water and Wastewater treatment industry click on the "Events" tab at the top of our website.*